Washer extractor

WS6–9CV

Exceptional savings and effortless use

Priority on people

Certified ergonomic design with a human-centered approach for an outstanding user experience

- ClarusVibe microprocessor and 7" color TS control: intuitive, fully editable programs, multi-language, on-screen statistics, fully controlling the detergent pumps
- Very easy connection to Jetsave and Dosave with one cable for power supply and one for dosing signals
- Simple connection to all generic pumps
- Connection to up to 15 pumps

Long-term savings

Extremely low water and energy consumption – see table below

- Automatic Savings weighs the linen and adjusts the water level to the amount of linen, saving water and energy at less than full load
- High extraction force for efficient dewatering
- Super Balance guarantees the correct extraction force

Pure control

Monitoring of the status of the equipment and performance from anywhere, allowing to take action to improve the business

- Washers connectable to OnE Connected, the personal assistant for hygiene validation, process management and revenue management

Global Advanced Hygiene

Global Advanced Hygiene program package[I] with proven log 6 reduction[II] disinfection of textiles through the laundry process, fulfilling the criteria of all local approved standards

I. Programs available in the standard library of all products, excluding products for specific segments where water temperature is not controllable.
II. Log 6 reduction equals to 99,9999% viral infectivity reduction. The efficacy of reduction of SARS-CoV-2 and other pathogens in the process is confirmed by RISE (The Research Institute of Sweden) on the basis of Electrolux Professional laboratory data.



Images shown are a representation of the product only and variations may occur.

Main options and accessories

- Automatic liquid detergent supply (optional I/O board)
- Dosave is a peristaltic based technology, designed for easy installation, easy programming and maximum savings
- The Jetsave option uses venturi-based, water-powered pumps that require less maintenance because there are no moving parts or squeeze tubes to replace. Dosage is reliable and installation is sleek and tidy thanks to the built-in flush manifold
- Connection to booking- /payment- system or coin meter

Main specifications		WS6–9CV			
Rated capacity, filling factor 1:9	kg/lb	9 / 20			
Drum, volume	litre	85			
Drum, diameter	ø mm	520			
Extraction	rpm	830			
G-factor		200			
Standard heating alternatives	electricity, kW	5.4 / 7.5			
Low energy heating alternatives	electricity, kW	2.0 / 3.0			
	steam	x			
	non-heated	x			
Consumption data "Normal 60°C"[1]		El		Steam[2]	
		Full load, 9 kg	Half load, 4.5 kg[3]	Full load, 9 kg	Half load, 4.5 kg[3]
Total time	Min	45	43	45	43
Water consumption (cold+hot)	litre	50.4+14.4	35.1+9	64.8+0	44.1+0
Energy consumption (motor/heating/ hot water)	kWh	0.1//0.45/1.0	0.1/0.3/0.65	0.1/-	0.1/-
Steam consumption	kg	-	-	2.2	1.1
Residual moisture	%	58	66	58	66

1. Water temperature 15°C cold water and 65°C hot water.
2. Depending on steam pressure.
3. Programs with AS.

Produced according to ISO 9001 and ISO 14001.
Certified with CB certificate for Low Voltage Directive and S-mark according to the Machinery Directive. Protection class IP X4D.

Electrical connections					
Heating alternative	Main voltage	Hz	Heating power kW	Total power kW	Recommended fuse A
Electric heated	220-240V 1/1N~	50/60	3.0/5.4/7.5	3.3/5.7/7.8	16/25/32
	220-240V 3~	50/60	3.0/5.4/7.5	3.4/5.7/7.8	10/16/25
	380-415V 3N/3~	50/60	3.0/5.4/7.5	3.4/5.7/7.8	10/10/16
	440V 3~	50/60	5.4/7.5	5.7/7.9	10/16
	480V 3~	60	5.4/7.5	5.7/7.9	10/16
Non heated/Steam heated	208-240V 1/1N~	50/60	[1]	0.4	10
	380-480V 1~[2]	50/60	[1]	0.4	10


1. Total power and recommended fuse does not depend on the heating power in those cases.
2. Prepared for 3~


Water and steam connection[1]		WS6-9CV
Water valves	DN	20
Water pressure	kPa	200-600
Capacity at 300 kPa	l/min	20
Drain valve	ø mm	75
Draining capacity	l/min	170
Steam valve	DN	15
Steam pressure	kPa	300-600
Liquid detergent supplies		5
Floor requirements		
Frequency of the dynamic force	Hz	13.8
Floor load at max extraction	kN	1.7 ± 3.8
Sound levels		
Sound power/pressure level at extraction[2]	dB(A)	73/59
Sound power/pressure level at wash[1]	dB(A)	62/48
Heat emission		
% of installed power, max		5
Shipping data[3]		
Weight	net, kg	114
Shipping volume	m^3	0.79
Accessories		
Steel base		x
Hose kits for water or steam		x
Fluff collector		x


1. Display
2. Door opening ø 310 mm
3. Detergent box
4. Cold water
5. Hot water
6. Re-used water
7. Drain valve
8. Liquid detergent supply
9. Electrical connection
10. Steam connection

1. The washer extractor is equipped with a built-in type AB airgap according to EN 61770. Maximum working pressure for Australia is 800 kPa.
2. Sound power levels measured according to ISO 60704.
3. Average data. Crated weight/shipping volume depends on configuration. Please contact logistics for exact measures.

Silver grey and dark blue color samples can be ordered on part number 472998313.

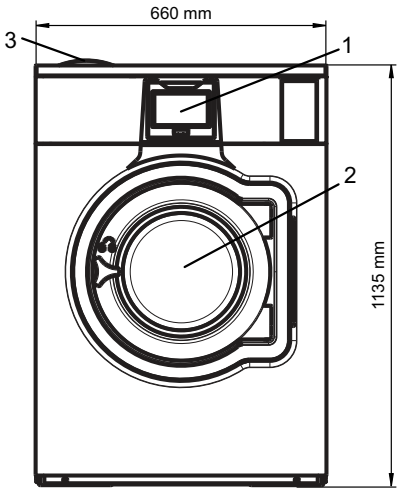

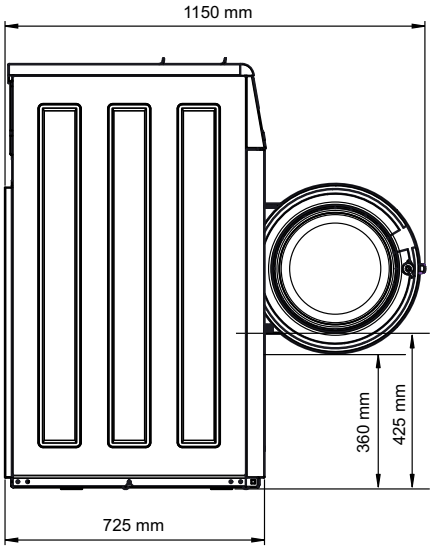

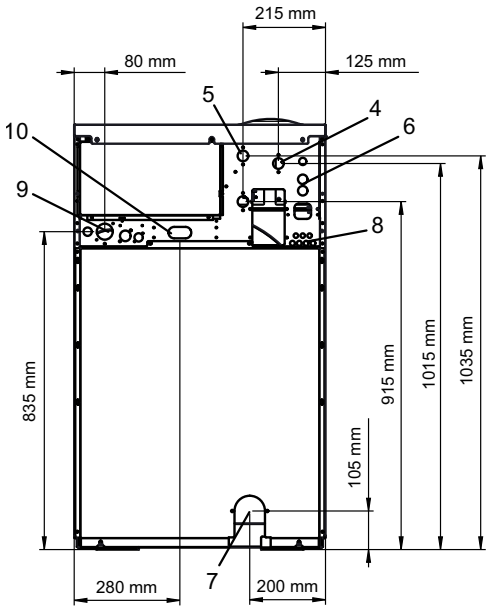

438913391EN/2026.08.26
We reserve the right to alter specifications without notice