

Industrial Cylinder Heated Drying Ironers

I 33



FEATURES

- Large surface contact with linen over an angle of 300°
- High polished, steel, thin cylinder
 - Reasonable price
 - Rapid response to temperature
 - Excellent thermal conductivity
- Emergency button and Main switch in one
- Finger protection for even more safety
- Durable Nomex ironing belts
- Extra heavy press roller for high quality of ironing
- Patented direct drive system - maintenance free system
- Patented central suction system with maintenance free operation
- Automatic cooldown
- Easy to operate microprocessor
- Frequency controlled motor
- Indication of preset temperature
- Space saving installation against the wall is possible: front return
- Exhaust outlet can be easily switched from back either to right side of the machine
- Electric or gas heating
- Metal fiber premix burner (for Gas only)
- Ergonomic design
- Finger protection bar

OPTIONS

- Coin operated version
- Central payment system operated version (CPS)
- Chrome-plated cylinder for a better thermal conduction and quality of ironing
- 3 temperature sensors



LOW ENERGY
CONSUMPTION




HIGH OUTPUT



COMPACT DESIGN

TYPE		I33-160 E	I33-200 E	I33-160 G	I33-200 G
ROLLER DIAMETER	mm	320	320	320	320
USEFUL ROLLER LENGHT	mm	1664	2080	1664	2080
CAPACITY	kg/h	62	70	58	72
SPEED	m/min	1-6			
HEATING					
Electric	kW	24.3	27.9		
Gas	kW			25	30
MOTOR					
Roller motor	kW	0.18	0.18	0.18	0.18
Fan motor	kW	0,095 (50 Hz) / 0,125 (60 Hz)			
Others	kW	0.08		0,17	
Max. temperature	°C	180			
Consumption of electricity	kWh	21,4	27,3		
Consumption of gas	m³/h			2,62	3,13
Max. gas pressure	mbar			60	
Noise level	dB (A)	< 57			
Ingress protection		IP42			
ELECTRIC CONNECTION		3x380-415 V +N 50/60 Hz 3x208-240 V 50/60 Hz 3x380-415/440 V 50/60 Hz 1x208-240 V 50/60 Hz			
DIMENSIONS					
HxWxD	mm	1110x2084x755	1110x2500x755	1110x2084x755	1110x2500x755
Netto weight	kg	410	465	390	440
Carton packing HxWxD	mm	1245x2185x755	1245x2600x755	1245x2185x755	1245x2600x755
Brutto weight	kg	460	530	440	505

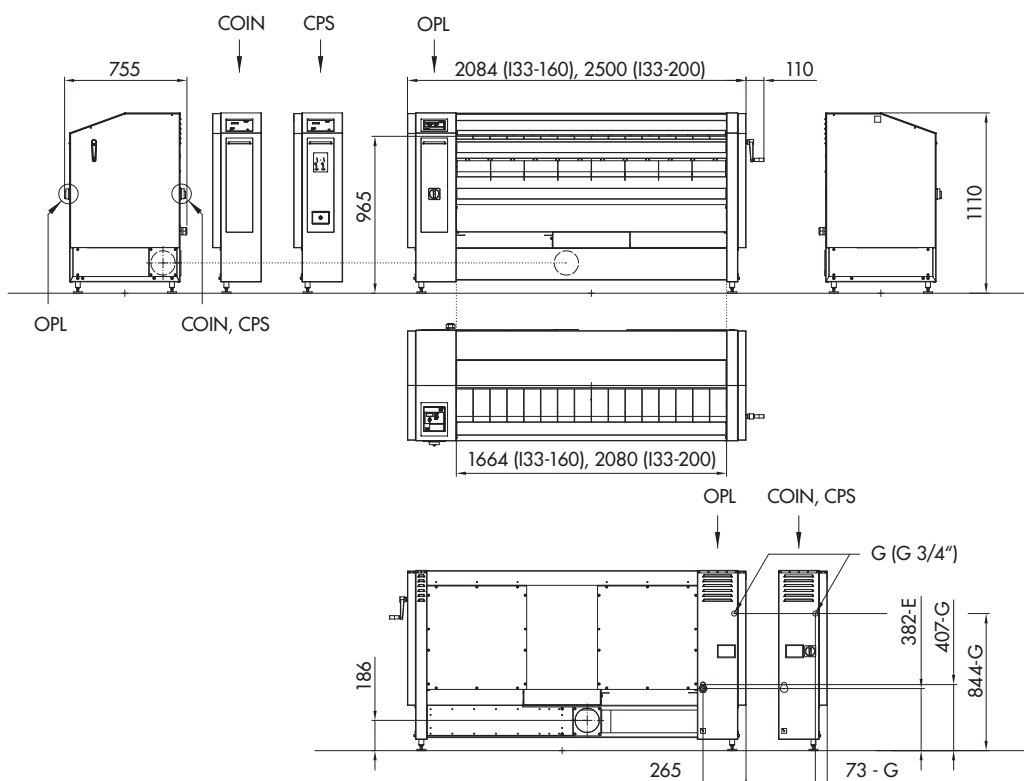

The company Primus preserves the right to change the machines and the specification in this leaflet at any time, without prior notice. Details and photographs are only for information and never binding.

www.primuslaundry.com

